




Anping County Zhuoda Hardware Mesh Co.,Ltd.  
Wire Mesh Industrial Zone, Anping County, Hebei, P. R.  
China.

Tel : 0086-318-7752001 7531068 Fax : 0086-318-  
7802001

e-mail : sales@yidawiremesh.com

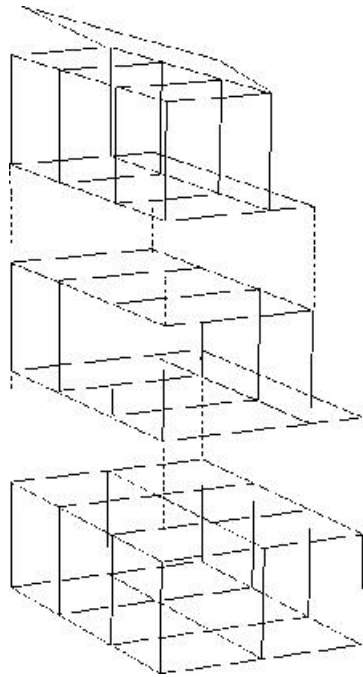

## GABION TRIPLE LIFE 700 SYSTEM

The gabion 700 System is essentially a standard gabion unit but the sizing, manufacture and mesh/wire have been chosen to improve ease of construction, optimize the design and improve the quality of construction.

The system is based primarily on a nominal 700mm deep unit with a nominal cell length of 700mm with the sides and diaphragms connected to the base panel so that it folds flat for ease of transportation.

The units are supplied with an extended base where necessary so that the base of one unit will form the lid of the unit below. All lids, bases, transverse diaphragms and side panels are manufactured from 76.2mmx76.2mmx3.0mm welded mesh panels with the face, rear and longitudinal diaphragms manufactured from 76.2mmx76.2mmx4.0mm to enhance quality and ease of installation.

Joining for manufacture is with clips or rings, on site assembly is with helicals on the vertical joints and helicals, rings or lacing wire on the horizontal connections.

2m x 0.7m/1m x 0.7m

2m x 1 m/1.4m x 0.7m

2m x 1.4m x 0.7m

## **WHAT ARE THE BENEFITS OF THE SYSTEM:-**

Better distribution of mesh reinforcement in the structure.

The unsupported mesh face is 700mmx700mm which reduces possible deformation of the face to 25% of a standard 1 m x 1 m unsupported face of the same wire diameter. A greater reduction is achieved over mesh face of 3.0mm or 2.7mm wire diameters, this leads to higher quality of construction..

The quality of filling of units is better: an operative can easily hand pack the front face which is not the case for 1 m deep units again greatly improving quality of construction.

Helicalling the vertical joints is simple and gives consistent joint strength over its full length. Helicalling provides the most efficient joint system. The cut end wires of the panel are enclosed within the helical thereby ensuring that snagging cannot occur (health and safety issues).

A greater range of wall heights and course widths can be designed to give the optimum economical design solution.

By utilizing a maximum unsupported mesh face of 700mm square, wall inclinations can be increased to 10 degrees without giving rise to construction problems resulting in more cost effective design.



Anping County Zhuoda Hardware Mesh Co.,Ltd.  
Wire Mesh Industrial Zone, Anping County, Hebei, P. R.  
China.

Tel : 0086-318-7752001 7531068 Fax : 0086-318-7802001

e-mail : sales@yidawiremesh.com

